


Quick Start Guide


A Navigation Method

Function Keys

(To activate the corresponding functions as displayed at the bottom of the LCD)

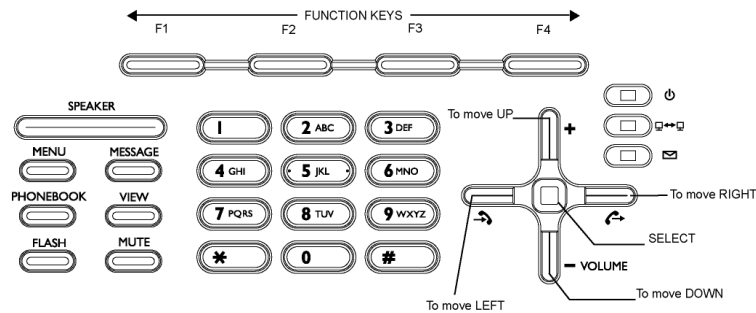

B Setting Up

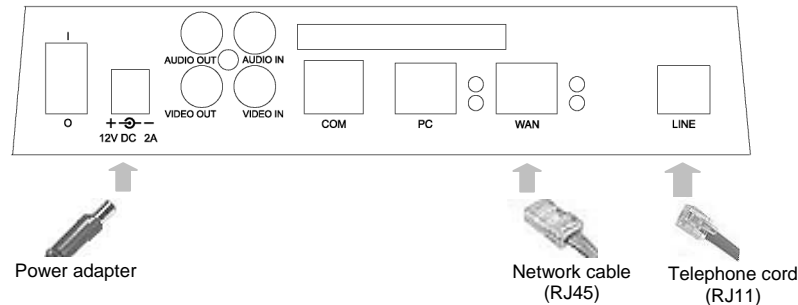

1. Connect network cable from **WAN** port to broadband modem.
2. Plug **power adapter** into the power connector.
3. If your Video Phone has a **LINE** port, you may connect a telephone cord from **LINE** port to phone outlet. Else, go to step 4.
4. Power up the Video Phone.

C Configuring Your Video Phone

Connecting by PPPoE

1. Go to **MENU** → **SETTINGS** → **PHONE SETTINGS**.
2. Scroll to **PPPoE** and change status to **ON**.
3. Enter the assigned PPPoE details by your service provider and save the details.






Connecting by Fixed IP address

1. Go to **MENU** → **SETTINGS** → **PHONE SETTINGS**.
2. Scroll to **IP address** and enter the assigned **IP address** by your service provider and save the details.
3. Do the same for **Netmask** and **Default Gateway**.

Connecting via Cable or DSL without login

1. There is no setting required.
2. To check if an IP address is assigned to the Video Phone, refer to the steps in **F. About your Video Phone**.

D Making Calls

Calling to	Dial
Another IP Video Phone or 3G mobile phone	Dial <IP Video Phone or 3G number> and  Video
Local or Mobile number	Dial <Local or Mobile number> and  Voice or  PSTN [^]
Other countries by IDD	Dial <IDD prefix> <Country code> <Area code> <Phone number> and  PSTN [^] or  Voice

[^] Only Applicable to models with **LINE** port

E Receiving Calls

When there is an incoming call, the Video Phone will ring and Caller number will be displayed. To pick up call,

1. Press **SPEAKER** to receive call in speaker mode.
or
2. Pick up handset to receive call.

F About your Video Phone

1. Go to **MENU** → **INFO**.
2. Select **About** to view information about the Video Phone.
or
3. Select **Version** to view information about the hardware and software version.

* Images are referenced to model MTA5531. May vary for different models