




FINDING A CONTACT

You can view the contents of the phonebook , and also dial a contact directly from the phonebook.

1. Press the MENU button
2. Press the >> button until you reach 3. Phonebook, then press OK
3. Press the >> button until you reach 3. View, then press OK
4. Press the >> button to browse the phonebook entries
5. Once you have found the contact you wish to call, press OK to connect to them

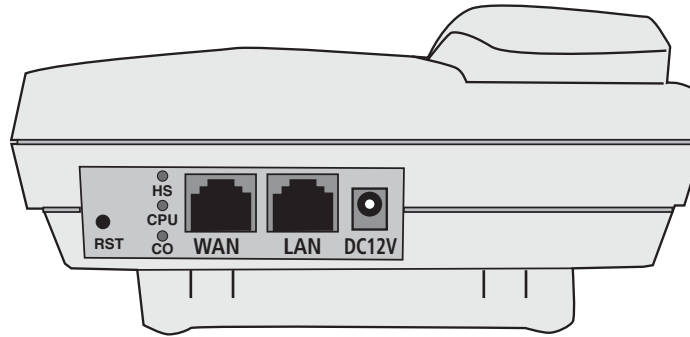

InnoMedia

MTA 3308 IP Phone

Quick Install Guide

USING THE MEMORY-DIAL BUTTONS

Your unit has 10 memory-dial buttons that allow you to dial frequently called numbers at the touch of a button. You must have the contact stored in the phonebook(see Adding a Contact above) in order to assign the number to a memory-dial button.

1. Press the MENU button
2. Press the >> button until you reach 3. Phonebook, then press OK
3. Press the >> button until you reach 4. Memory Dial, then press OK
4. Press the memory key you want to program
5. Press the >> button until you find the contact that you want to assign to this memory key, then press OK
6. The memory key is now programmed for one-touch dialing



Appendix A. LED Status Summary

LED	Color	State	Description
HS	Green	Solid	Phone is off-hook
	None	Unlit	Phone is on-hook
	None	Unlit	Error condition (with phone off-hook)
CPU	Green	Blinking (3 sec on, 3 sec off)	System provisioning in progress
	Green	Blinking (1 sec on, 1 sec off)	Normal (Initialization completed)
	Green	Always on	Error condition
	Green	Blinking	Ethernet activity for VoIP module
CO	Green	Blinking	Voice activity
	None	Unlit	No voice activity

Troubleshooting

Problem:

I have no dial tone

Solution:

Your unit may not have successfully connected to the network.

1. Unplug the power of the unit
2. Check to make sure you connected the ethernet cable from your broadband modem to the WAN port on the back of the IP Phone
3. Plug in the power of the unit and wait for a few seconds while it initializes
4. When CPU light blinks steadily, you may try again to make a phone call

Specifications

Network Interface - WAN	10/100 Base-T
	Connector RJ-45
Network Interface - LAN	10/100 Base-T
	Connector RJ-45
Dimension	6.7 in x 8.6 in x 2.1 in
	17 cm x 22 cm x 5.5 cm
Power Supply	Output: DC 12V/1A / Inp110~240V/50~60Hz
Power Consumption	Idle: 12V/0.68A (8.16W) / Talking: 12V/0.78A)
Operating Temperature	32°F to 104 °F (0°C to 40 °C)

Introduction

The InnoMedia MTA 3308 IP Phone is an integrated device providing telephony service over a broadband network. This guide will help you to quickly install and configure your unit so that you can start placing calls right away.

Package Contents

The InnoMedia MTA 3308 IP Phone comes with the following items:

- 1 MTA 3308 IP Phone
- 1 AC/DC Power Adapter
- 1 Ethernet Cable
- 1 Quick Install Guide

Note: Make sure you have received above items in the Package. If anything is missing, please contact your network service provider.

www.innomedia.com

© 2002 InnoMedia, Inc. All rights reserved. InnoMedia and the InnoMedia logo are trademarks of InnoMedia, Inc. All other brand and product names may be trademarks of their respective companies.

Version 1.0; 06-02
82-330801-01

Installation

1. Make sure your broadband Internet access device is powered on and your connection is up. (See your service provider's documentation).

2. Connect included AC/DC power adapter to the electrical outlet and its cable to the DC IN port on the back of the IP Phone (see Figure 1).

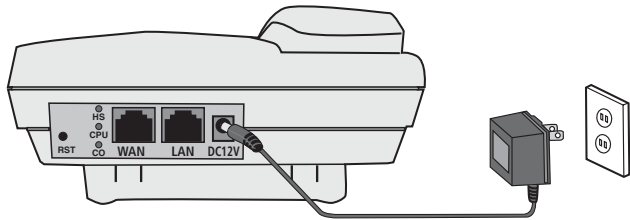


Figure 1

3. Connect one end of the included Ethernet cable to the WAN port on the IP Phone (see Figure 2) and the other end of the Ethernet cable to the Ethernet port on your broadband Internet access device (e.g., cable modem, ADSL modem, wireless modem, etc).

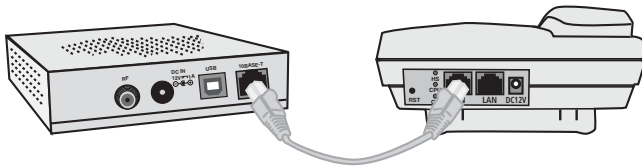


Figure 2

NOTE: If you also want to use your PC to access the same broadband IP network, connect one end of your PC's Ethernet cable to the LAN port on the IP Phone and the other end of the Ethernet cable to the Ethernet connector on the back of your PC.

Operating the IP Phone

INITIALIZATION

- When the unit is powered on, the display will show the following message for a few seconds:

Initializing...

- When the unit has successfully connected to the network, you will see the date and time displayed:

Jan 20 2:20AM

MAKING CALLS

- Pick up the handset or press the SPEAKER key
- You should hear a dial-tone and see the following on the display when dialing:

Calling...
14084325400

The number you dialed will be displayed.

- When you are connected, the IP Phone will display a call timer to show you how long you've been on the current call
- When your call is completed, simply hang up the handset and/or click off the SPEAKER key

CALLER ID SERVICE

Your unit is compatible with Caller ID service offered by your service provider. If you have subscribed to this feature, the calling party's information will be displayed after the first two rings.

If the calling party has blocked its Caller ID, then the display will show Anonymous Caller.

CALL LOGS

In conjunction with the Caller ID feature, your unit stores logs for up to 30 calls, including the time and date.

The Call Log information is sorted by the most recent to the oldest call. When the log has reached its maximum capacity, the oldest call will be deleted as each new call is recorded.

If you have missed any calls while you were away, then your unit will provide a visual indication:

Jan 01 12:00AM
3 missed calls
Press OK to
access call log

If you press OK you will be immediately taken to the Missed Calls log, where you can review the calls that you missed while you were away.

1. Jan 25 2:20PM
John Doe
14085551212
Press OK to call

To view additional log entries, simply press the << or >> buttons on your unit.

Note: If you power off your unit, then all call logs will be cleared.

USING THE PHONEBOOK

The Phonebook feature allows you to store up to 50 contacts' names and phone numbers.

ADDING A CONTACT

You can add contacts to your phonebook by doing the following:

- Press the MENU button
- Press the >> button until you reach 3. Phonebook, then press OK
- Select 1. Add, by pressing OK again
- Enter a phone number for the contact and press OK
- Enter the contact's name and press OK
- The new contact is now stored in your phonebook.

To enter characters and symbols while in the phonebook, simply use the dialing pad on your unit. The following table describes the characters available with each press of the keypad:

Key	Characters	Key	Characters
1	@ & ' () , - . / 1	7	P Q R S p q r s 7
2	A B C a b c 2	8	T U V t u v 8
3	D E F d e f 3	9	W X Y Z w x y z 9
4	G H I g h i 4	0	0
5	J K L j k l 5	*	*
6	M N O m n o 6	#	#

When entering characters, you may press << if you need to erase a mistake. Press >> to enter a space.