



# InnoMedia IP Phone P7XX Series

## Quick Installation Guide

### Model P730 User Interface

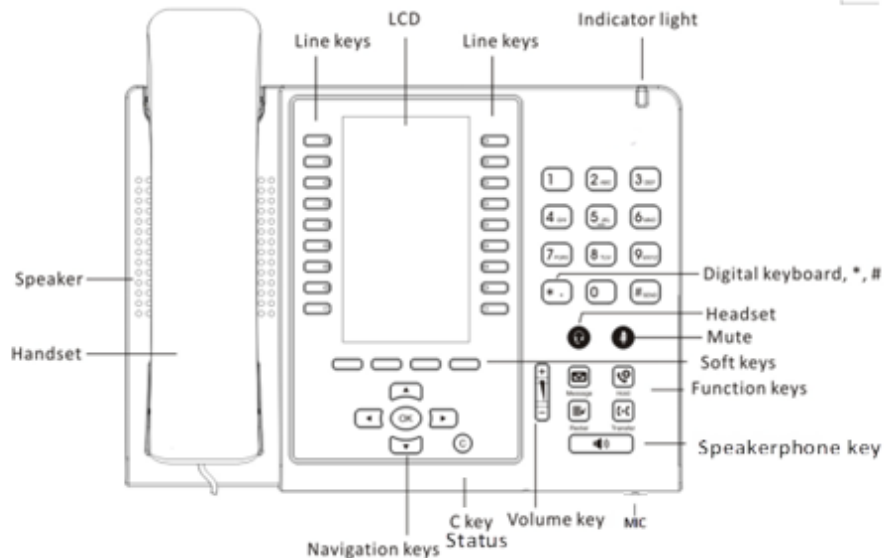

### Model P720 User Interface

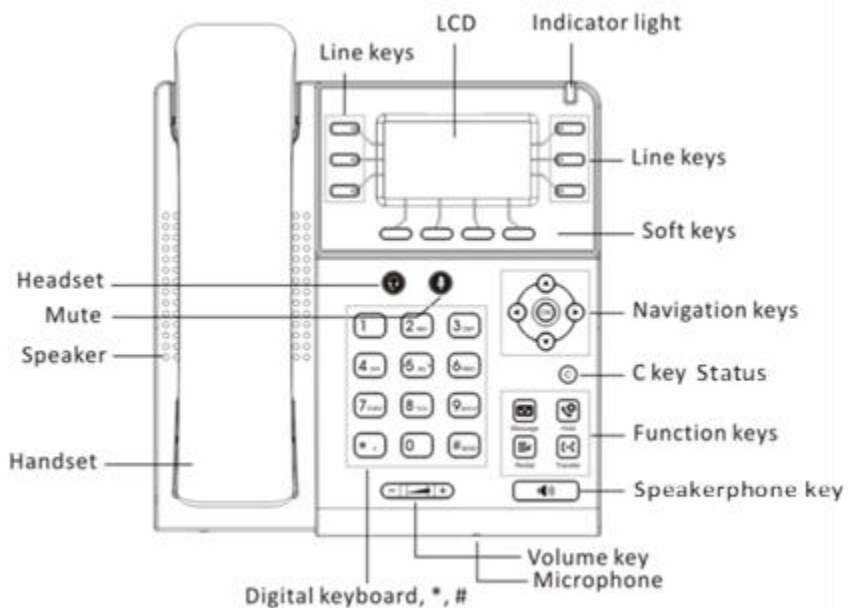

### Model P710 User Interface

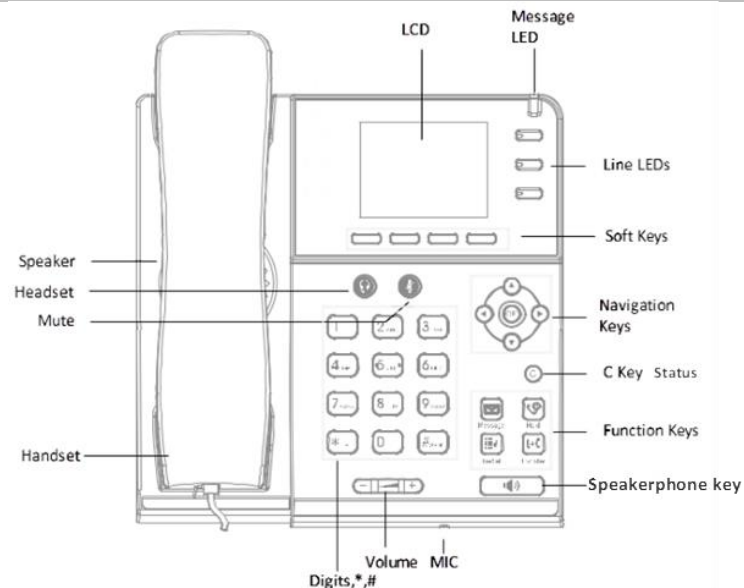


Table 1 Message LED/Indicator light

LED Status	Description
Red, flashing	Incoming call, or call on-hold
Red, steady	Off-hook, or call in progress, or SIP account registration failed

Table 2. Line LEDs

LED Status	Description
Red, flashing	Incoming call
Green, steady	Call in Progress
Green, flashing	Call on-hold
LED off	Line idle


Table 3. Other LEDs

Buttons	Description
Headset, Mute, Speaker	Red color when the corresponding function is enabled.


## List of Packaged Items

Item	
IP Phone	1
Handset	1
Network Cable	1
Handset Cable	1
Desk Stand	1
DC12V Power Adapter	Can be purchased separately
Wall Mount Bracket	Can be purchased separately
Wi-Fi Dongle	Can be purchased separately

## Desk Stand

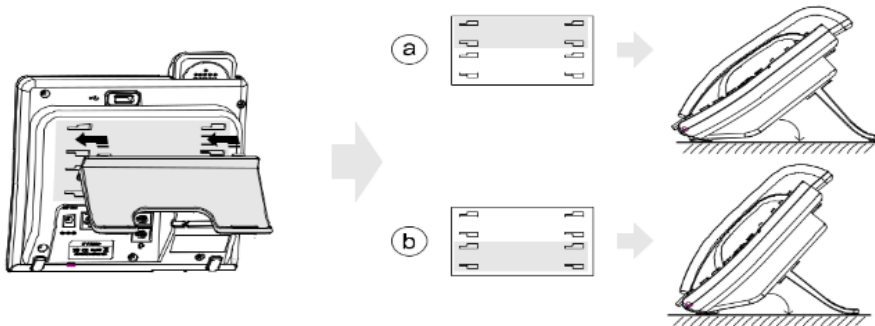

## Physical Interfaces

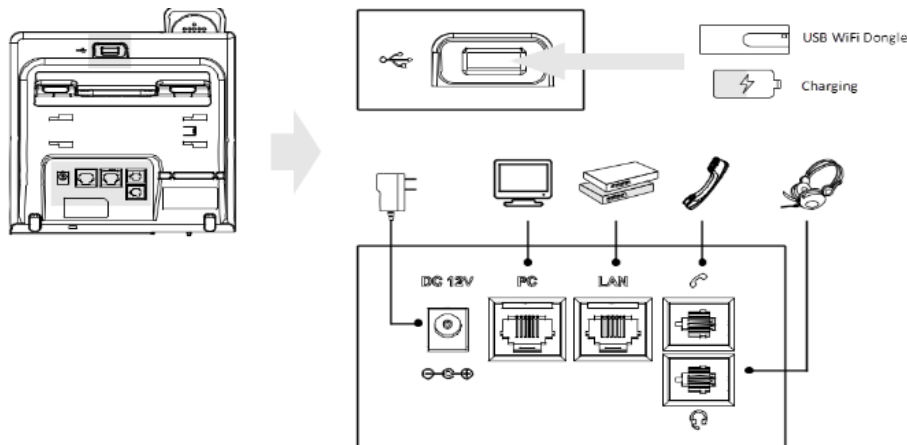

Power on the Phone and connect the LAN port to the router via the Network cable.

## Configuration via Keypad

### Network Settings

Press the **Menu** soft key and follow the sequence: **System Settings > Advanced Settings > enter password** (Default: blank) **> Network > LAN Port > IP**.



Select from the following options:

- DHCP: Automatically acquires IP address from a DHCP server
- Static: Input parameters according to the Router's settings. [IP | Subnet Mask | GW]

### VoIP Account Registration

Press the **Menu** soft key and follow the sequence: **System Settings > Advanced Settings > SIP Accounts**.

Choose an account (line) and configure it.

- Enable Account, press ▲▼ keys to enable or disable.
- Navigate to Account Setting items, press ◀▶ keys.
- Select [1 | 2] line(s) for an account (Use Line Keys).
- Input SIP Account settings provided by your administrator: [Description | DisplayName | Authentication Name | Account (username)|User (SIP) Password | SIP Server | Outbound Proxy]
- Registration Successful: Line status displays .
- Registration Fails: Line status displays .

Note: Toggle the soft key [123|2aB|abc|ABC] to input strings.

## Setting via Web Console

Obtain the Phone's IP address to access its Web console. Press **Menu** soft key and follow the sequence: **View Status > Wired IP**. Enter this IP address into the address bar of a web browser, e.g., <http://192.168.1.151>.

Default login ID and password: *admin / admin*.

### Network Settings

Navigate to **Network > LAN Port**

- Choose DHCP or Static IP, and configure accordingly.

### VoIP Account Registration

Navigate to **SIP Account > Basic**. Select an Account to configure. Follow the instructions from your administrator to complete the SIP account registration. Navigate to **Phone Status** to view the account registration status.

## Placing or Answering Calls

Either pick up the handset, press the **Speakerphone key** or press a **line key** to place a call or answer an incoming call.

- For outgoing calls, dial the phone number via the keypad (Redial. Press **Redial** key).
- For incoming calls, pick up the handset or press the **Speakerphone key** to answer.
- Dial from Call History. Press softkey **Log** and press ▲▼ or ◀▶ to choose or toggle calls and numbers.