



USER QUICK START

This Quick Start contains the essential information for installing and setting up the InfoTalk unit, so that users can start using the InfoTalk to place calls and enjoy great savings immediately.



User Quick Start Guide

The aim of this Quick Start Guide is to provide you with sufficient knowledge to set up and start using your InfoTalk 7 after stepping through the instructions.

I. INSTALLATION

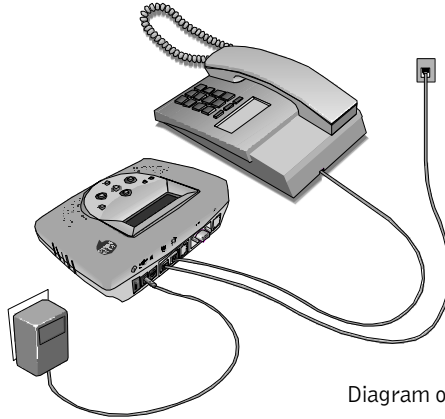


Diagram of overall connection

II. BUTTON FUNCTIONS



Welcome screen



Diagram of
phone keypad

BUTTON	FUNCTION
	To scroll Backward or Forward
	To Confirm selection or to Proceed to the next level
	To Exit from selection or Return to previous screen
	To remain online when making follow-on Internet calls
	For quick access to InnoSphere Call dialing mode

[Important]

III. INFOTALK 7 CONFIGURATION SHEET

Before you proceed to configure your InfoTalk, we suggest that you fill in the information in column first to serve as your reference.

Sub-Menu	Option	Explanation	Example	Actual
Phone Book	User Phone Number	The phone number of the phone line which is connected to your InfoTalk. Please enter the country code, area code and the phone number into your InfoTalk.	Phone Number: 8872500 Area Code: 408 Country Code: 1	
Dial Up Settings	Name	Provide a name to your ISP profile.	David - AT&T	
	ISP Phone No.	Your ISP dial-up phone number.	4379000	
	Login Name	Your ISP account User ID	David	
	Login Password	Your ISP account Password	apple123	
InnoSphere Calls	User ID	Refer to the given envelope for the assign User ID	1234567890	
	Password	Refer to the given envelope for the assign password	1234	

[NOTES]

- Login Name and Password are both case sensitive; hence please enter the exact character whereby lower case "c" is not the same as upper case "C". If the wrong information is entered, you will receive "Invalid UserID and Password" message on your CONNECTIVITY TEST.
- Please note that your ISP Internet account has specific Login Name/UserID and Password; they are not the same as the Login Name/UserID for your other email address like your Hotmail or Yahoo Mail. Please enter only the correct information.
- If you have multiple **Dial Up Settings** profiles and **InnoSphere Calls** profiles stored into your InfoTalk, please go to the SELECT DEFAULT option in each of the respective sub-menu and choose the profiles you want to use. Without making your choice, InfoTalk will use the first profile as your default profile.



Default screen

IV. Configuration and Settings

Enter **User Phone Number**

1. Press at Default Screen.
2. Press at Phone Book mode.
3. Press at User Phone option.
4. Enter the user's PSTN phone number, area code and country code into the option, and press to confirm.
5. Press to exit and save all settings.

Configure **Dial Up Settings**

1. Press at Default Screen.
2. Scroll menu with or to reach Dial Up Settings and press to enter.
3. Press again to enter Add (default option), otherwise scroll with or for other options.
4. At Name, key in the name for your dial up profile using the phone keypad.
5. Press to store entry.
6. Scroll with or to configure remaining settings.
7. Repeat Steps 4-6 to configure other settings which include ISP Phone Number, Login Name and Login Password using the keypad.
8. Scroll with or to access other options such as Change Settings, Erase Settings and Select Default Settings.
9. After all Dial Up Settings are completed, press to exit and save all settings.

Configure **InnoSphere Calls Profile**

1. Press at Default Screen.
2. Scroll menu with or to reach InnoSphere Calls and press to enter.
3. Press to select Add (default option), otherwise scroll with or for other options.
4. Press 2 times to access profile settings.
5. Enter the User ID using the phone keypad.
6. When completed, press to store entry.
7. Scroll with or to configure remaining settings.
8. Repeat Steps 4-6 to access and configure Password. Press to exit this sub-menu.
9. Scroll with or to access other options such as Change Profile Settings, Select Default Profile and HotKeys*.
10. After completing all InnoSphere Call configurations, press to save all settings and exit.

*HotKeys are handy when you want to use your cordless phone to access both InnoSphere Calls and Talk-to-Talk Calls.

KEY CHARACTER

1	1~!#\$%^ &*0_+ {}:/' <>?`-=#\~/
2	2ABC
3	3DEF
4	4GHI
5	5JKL
6	6MNO
7	7PQRS
8	8TUV
9	9WXYZ
0	0, @
#	Space
*	Back space / Delete

Diagram of character representation



To toggle between lower case and upper case, press on the keypad for about 2 seconds.



Wait for 1 second before entering the next character.



Obtain your User ID and Password before configuring your InnoSphere Profile





Always press to confirm selection and to exit menu.



Press to move forward and to go backward when scrolling through the menu.



Press to delete character



Press to insert character



V. CONNECTIVITY TEST

To perform Connectivity Test

1. Press at Default Screen.
2. Scroll menu with or to reach Connectivity Test.
3. Press at Test Mode.
4. Press to start test, otherwise press to exit.

Once InfoTalk 7 passes the connectivity test, you are ready to make your first Internet call.


VI. MAKING CALLS

After configuring your InnoSphere accounts, InfoTalk 7 can call to any phone or another InfoTalk 7 device in the world.

InnoSphere Calls

1. Pick up phone handset.
2. Wait for 1 sec, and the  icon will appear on the screen.
3. Press button, InfoTalk will display < InnoSphere Call > on the screen.
4. Enter the caller's **Country code + Area code + Phone Number + #**
 Example: To call a phone number in Shanghai
 where 86 is the Country code
 21 is the Area code
 3351234 is the remote phone number
 please dial 86 21 3351234 #

5. Your InfoTalk will start the Internet connection automatically.
6. Within 1-2 minutes, you will hear a ring back tone and the screen shown below will appear when InfoTalk has accessed InnoSphere network successfully.

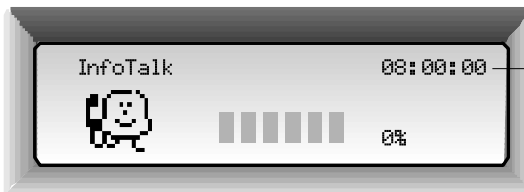

8 Hours of InnoSphere talk time left

When the remote party picks up the call, you can start your conversation.

Talk-to-Talk Call

1. Pick up phone handset.
2. Wait for 1 sec, and the  icon will appear on the screen.
3. Press  button, InfoTalk will display <Talk2Talk:> on the screen.
4. Enter your **IDD prefix + Country code + Area code + Remote phone number.**

Example: Call a phone number in Shanghai

where 001 is the IDD prefix
 86 is the Country code
 21 is the Area code
 3351234 is the remote phone number
please dial 001 86 21 3351234


5. After hearing 2 rings, press # to initiate Internet connection.
6. You can choose to hang up your phone.
7. Both sides can pick up the phone again upon hearing the success tone
8. The screen below will appear when both sides have picked up the phone.



Enjoy your Internet conversation.

Note: You need a valid InnoSphere account in order to make InfoTalk7-to-InfoTalk7 calls.

InfoTalk 7 Navigation Menu

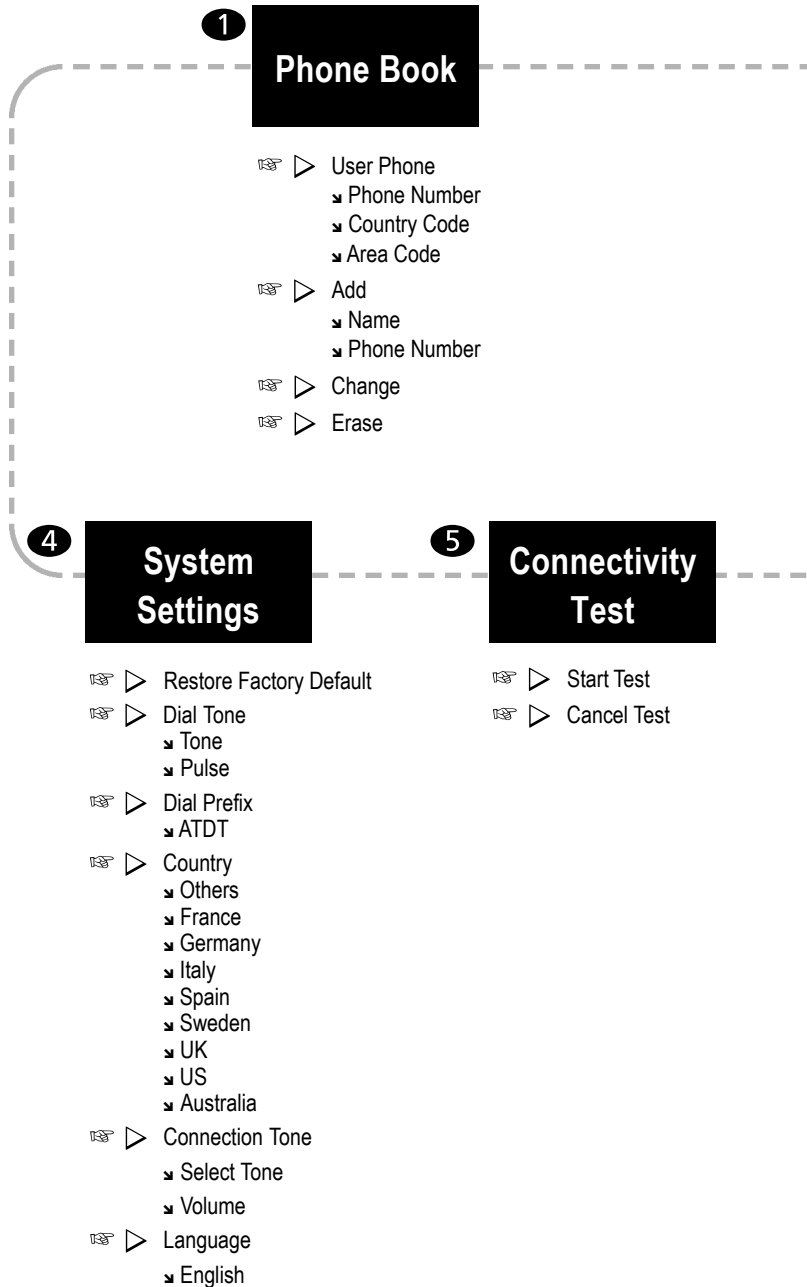

2

Dial Up Settings

- ☞ ▷ Add
 - ▾ Name
 - ▾ ISPPhone Number
 - ▾ Login Name
 - ▾ Login Password
- ☞ ▷ Erase
- ☞ ▷ Select Default

3

InnoSphere Call

- ☞ ▷ Add
 - ▾ Profile 1
 - User ID
 - Password
 - ▾ Profile 2
 - ▾ Profile 3
- ☞ ▷ Change
- ☞ ▷ Select Default
- ☞ ▷ Hot Keys

6

Software Upgrade

- ☞ ▷ Notify Upgrade
 - ▾ On
 - ▾ Off
- ☞ ▷ Upgrade

7

Calling Features

- ☞ ▷ Call Waiting
 - ▾ Enable
 - ▾ Disable
- ☞ ▷ Caller ID
 - ▾ Activation Control
- ☞ ▷ Received Calls
 - ▾ View
 - ▾ Store
 - ▾ Erase
- ☞ ▷ Call Blocking
 - ▾ Add
 - Blocked Number
 - Manual
 - Phone Book
 - ▾ View
 - ▾ Activation Control

InnoMedia Ptd Ltd.

10 Science Park Road, #03-04
The Alpha, Singapore Science Park II, SINGAPORE 117684
Tel: (65) 6-872- 0828 Fax: (65) 6-872-0900

InnoMedia, Inc.

186 Topaz Street
Milpitas, CA 95035-5429 USA
Tel: (408) 432-5400 Fax: (408) 432-5404

InnoMedia Technology Inc.

3F, No 3, Industrial East Road IX,
Hsinchu Science-Based Industrial Park, Hsinchu, TAIWAN 300
Tel: (886) 3-564-1299 Fax: (886) 3-564-1589

InnoMedia, Inc.

No. 22 Chao Wai Street, Prime Tower, Suite 1405
Chaoyang District, Beijing 100020, P.R. CHINA
Tel: (86) 10 6588 5141 Fax: (86) 10 6588 5140

InnoMedia Website: www.innomedia.com

InnoSphere Website: www.innosphere.net